

UNIGATE® FC


Connectable Multi-Protocol-Module

Norm compliant

Certified

Programmable

Designed & manufactured in Germany

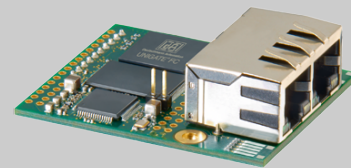

数据手册

Complete PROFINET IO Device interface (Slave)

100 Mbit/s full duplex

32-Bit Microprocessor for fast response time

Isolated PROFINET interface 2x RJ45-connector

Integrated 2 port switch (e. g. for daisy chaining)

Up to 1440 Bytes input- and 1440 Bytes output data

UART up to 520 kBaud

Technical data

Dimensions (WxDxH in mm)	47-52 x 56 x 18
Voltage supply	3,3V
Weight	approx. 25 g
Current consumption	Typ. 550mA
Operating temperature	Industrial temperature range from -40° C up to +85° C
Operating-/Transport temperature	-40° C ... +100° C
Fieldbus functions	All specified PROFINET functions
Interface	2x UART, 1x SPI/Syn. serial
Technology	32-Bit-Processor
Certification	PI (precertified)

订货信息

订货名称	描述	订货号
UNIGATE FC-PROFINET 2Port	All-In-One Single-Chip Interface for PROFINET 2Port, 3,3V	V3851